

Технические характеристики башенного крана ZTM ZTL286-12

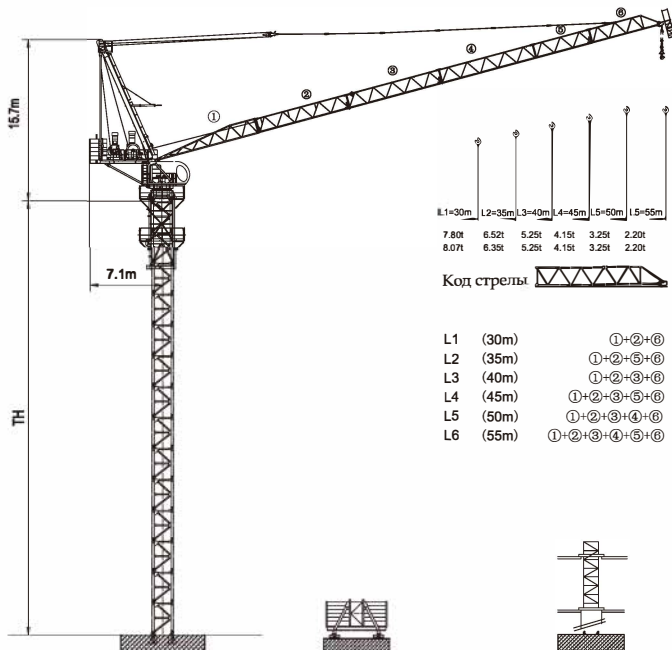


Диаграмма грузоподъемности

R (m)	Запасовка каната	R (Cmax) (m)	Cmax (t)	15	20	25	30	35	40	45	50	55
55	II	29.00	7.00	7.00	7.00	7.00	6.90	5.70	4.50	3.50	2.80	2.20
50	II	30.50	7.00	7.00	7.00	7.00	7.00	6.10	4.90	4.00	3.25	
	IV	23.50	10.00	10.00	10.00	9.20	6.90	5.40	4.30	3.40	2.70	
45	II	32.50	7.00	7.00	7.00	7.00	7.00	6.35	5.15	4.15		
	IV	18.70	14.00	14.00	12.80	9.50	7.40	5.80	4.60	3.70		
40	II	33.10	7.00	7.00	7.00	7.00	7.00	6.52	5.25			
	IV	18.80	14.00	13.00	9.60	7.50	5.80	4.75				
35	II	33.40	7.00	7.00	7.00	7.00	6.52					
	IV	19.20	14.00	14.00	13.40	9.80	7.60	6.00				
30	II	30.00	7.00	7.00	7.00	7.00						
	IV	20.00	14.00	14.00	14.00	10.00	7.80					






Диаграмма грузоподъемности


R (m)	Запасовка каната	R (Cmax) (m)	Cmax (t)	15	20	25	30	35	40	45	50	55
55	II	34.57	6.00	6.00	6.00	6.00	6.00	5.87	4.62	3.63	2.85	2.20
50	II	36.54	6.00	6.00	6.00	6.00	6.00	6.00	5.12	4.08	3.25	
	IV	25.86	10.00	10.00	10.00	10.00	8.04	6.28	4.95	3.91	3.08	
45	II	36.84	6.00	6.00	6.00	6.00	6.00	6.00	5.20	4.15		
	IV	22.84	12.00	12.00	12.00	10.61	8.14	6.36	5.03	3.98		
40	II	37.05	6.00	6.00	6.00	6.00	6.00	6.00	5.25			
	IV	22.97	12.00	12.00	12.00	10.69	8.21	6.43	5.08			
35	II	35.00	6.00	6.00	6.00	6.00	6.00	6.00				
	IV	22.81	12.00	12.00	12.00	10.59	8.12	6.35				
30	II	30.00	6.00	6.00	6.00	6.00	6.00					
	IV	22.71	12.00	12.00	12.00	10.52	8.07					



Мачта L68B3 Нагрузки (реакции) опоры мачты



Ø2.0m-FB68A						
	(m)	30-35	40	45	50	55
	(m)	51.2	48.2	45.2	42.2	39.2
3.0m	L68B3	10	9	8	7	6
3.0m	L68B3S	2	2	2	2	2
7.5m	L68G	1	1	1	1	1
7.5m	L68J	1	1	1	1	1
F2(t)	●	136	137	138	139	140
	■	226	227	228	229	230
F3(t)	●	92	93	94	95	96
	■	184	185	186	187	188
	(t)	69				



Ø2.0m-DDJ68P						
	(m)	30-35	40	45	50	55
	(m)	43.7	40.7	37.7	34.7	31.7
3.0m	L68B3	8	7	6	5	4
3.0m	L68B3S	2	2	2	2	2
7.5m	L68G	1	1	1	1	1
7.5m	L68J	1	1	1	1	1
F1(t)	●	90	91	92	93	94
	■	119	120	121	122	123
	(t)	84				


● В рабочем состоянии

■ В нерабочем состоянии

⚙️ Общий вес крана в свободном состоянии (без учета противовеса и балласта)

★ Выбирая оптимальную секцию мачты (L68A1/L68B1/L68B2), обратитесь к нам за консультацией






Габариты внутреннего
отверстия для подъема
башенного крана

Ø 2.0m-BA68A						
 (m)		30-35	40	45	50	55
H ₁	(m)	37.5	34.5	31.5	28.5	25.5
3.0m	L68B3	10	9	8	7	6
3.0m	L68C	2	2	2	2	2
1.5m	L68D	1	1	1	1	1
A1(m)	P(t)	R(t)	X(m)	Y(m)		
12	89	30	2.58	2.17		

Подъемная стрела

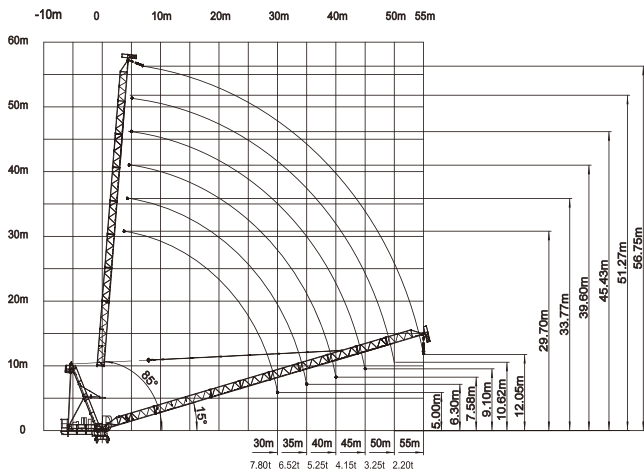

Спецификации

Механизм								Мощность двигателя kW
			m/min	t	m/min	t		
	14t	75LVF35	0-42.5 0-64 0-85	7.0 4.6 2.4	0-21 0-32 0-42.5	14.0 9.2 4.8	690 >690m ☆	55
	12t	55LVF30	0-37.5 0-57 0-90	6.0 4.0 1.7	0-19 0-29 0-45	12.0 8.0 3.4	600m	45
	60DVF30K		15° - 85° 2.2min					45
	RVF7.5		0-0.7 rpm					2×5.5
	RT		12.5-25 m/min					4×2.6/5.2

 Напряжение	kVA
380V (±10%) 50Hz	135

☆ Обратитесь за консультацией

Данная спецификация не является юридическим документом. Для получения точной технической информации, пожалуйста, обратитесь к соответствующим инструкциям или свяжитесь с дистрибьютором.